


N4.50

SPECIFICATIONS

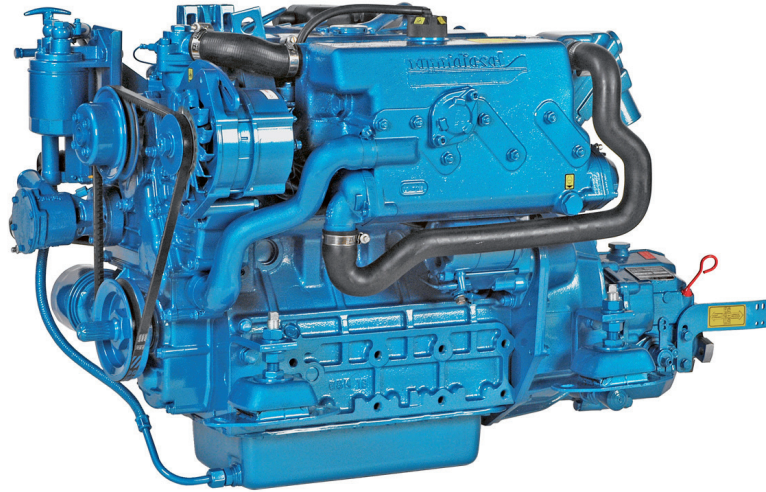

Power at crankshaft	35.42 kW [47.5 cv]	Engine base	Kubota
Displacement	2.197 l [134 in³]	Fuel system	Mechanical Indirect injection
Configuration	4 cylinders in line	Air intake	Natural
Operation type	4 strokes Diesel	Cooling	Closed cooling with heat exchanger
Bore & Stroke	83 x 92.4 mm [3.27 x 3.64 in]	Max mounting angle	15° Front down 15° Front up
Compression ration	22 : 1	Alternator	12 Volt 120 Amp
Rated speed	2800 rpm	Rating	M4
Idling speed	840 rpm	Emission compliance	RCD 2013/53/EU EPA marine Tier 3 BSO2
Peak torque	146 Nm	Dry weight with TTMC35A	229 kg [504 lbs]
Peak storque speed	1800 rpm		

N4.50

35.42 kW [47.5 cv] at 2800 rpm

TECHNICAL DESCRIPTION

ENGINE BLOCK

- 4 Cylinders in line
- Gear-driven valve train
- Water cooled exhaust manifold

FUEL SYSTEM

- Mechanical governor
- Cam driven in-line injection pump
- Fuel feed pump with hand primer
- Fuel filter

LUBRICATION SYSTEM

- Replaceable full-flow oil filter
- Oil dipstick
- Oil cooler

COOLING SYSTEM

- Closed cooling with heat exchanger
- Gear driven self-priming raw water pump
- Coolant circulating pump
- Water cooled exhaust elbow

ELECTRICAL SYSTEM & INSTRUMENTATION

- 12 V Electrical system
- 12 V / 120 A alternator
- Electric starter motor
- Electric stop function
- Instrumentation panel, including Start/ Stop, tachometer & alarms
- Extension cable harness with plug-and-play

AIR INTAKE

- Mounted air cleaner

OTHER FEATURES

- Flexible engine mounting
- Bracket for control cables

OPTIONAL EQUIPMENTS & ACCESSORIES

- Keel cooling adaptation
- Complete marine propulsion systems
- Throttle and shift controls
- Additional instrumentation, Flying bridge extension harness
- Polyester frame (Sail Drive version)
- Engine mounting adaptation
- Two pole electrical system
- Water boiler systems
- Stuffing box connections
- Complete fuel systems
- Complete exhaust systems
- SOLAS approved version

RATINGS

- Up to 3000 annual operating hours
- Load factor up to 40%
- Full power for no more than 1 hour out of each 12 hours of operation. The remaining time must be at, or below cruising speed

TRANSMISSIONS

SHAFT LINE


- TTM345A - TM345H
- TMC260
- TMC60
- TTMC35A - TTMC35P
- ZF25 - ZF25M

SAIL DRIVE


- Sail Drive
- Contact your Nanni representative for more details and availability about transmissions types and models range.

PERFORMANCE CURVES


POWER AT CRANKSHAFT

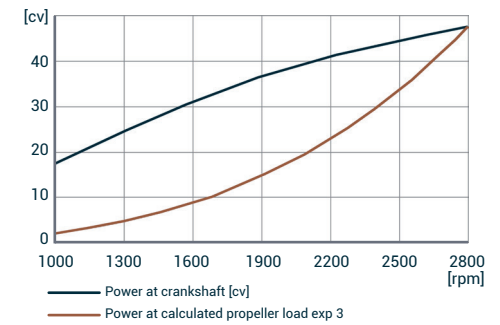


TORQUE AT CRANKSHAFT

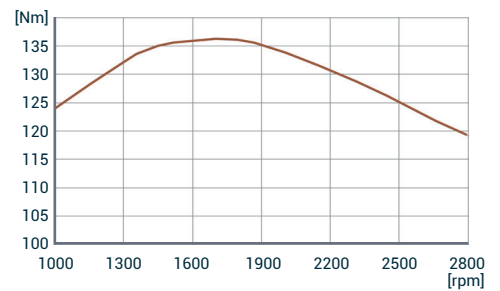

FUEL CONSUMPTION

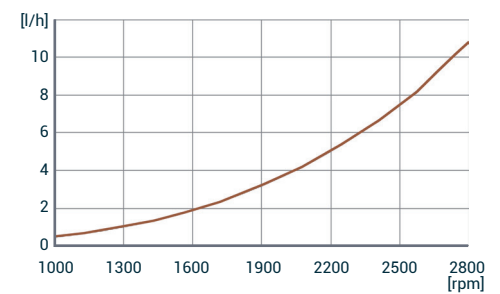

DIMENSIONS WITH TTMC35A

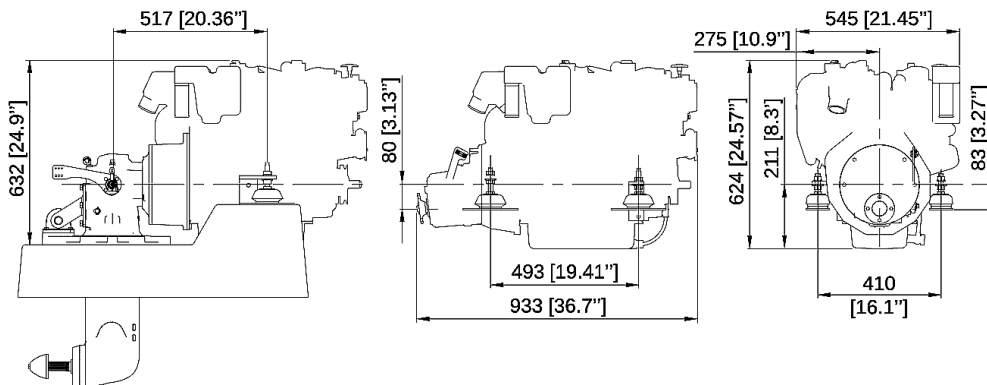

NANNI INDUSTRIES S.A.S.

11, Avenue Mariotte - Zone Industrielle
33260 La Teste - France
Tel: +33 (0)5 56 22 30 60
Fax: +33 (0)5 56 22 30 79

Technical data according to ISO 8665. This document is not contractual. Nanni reserves the right to modify any of the characteristics stated in this document without notice, in a constant effort to improve the quality of its products. Images and illustrations may show non standard equipments. All combination of equipment & accessory are not available.

DGBXXC01007